


DACAPO

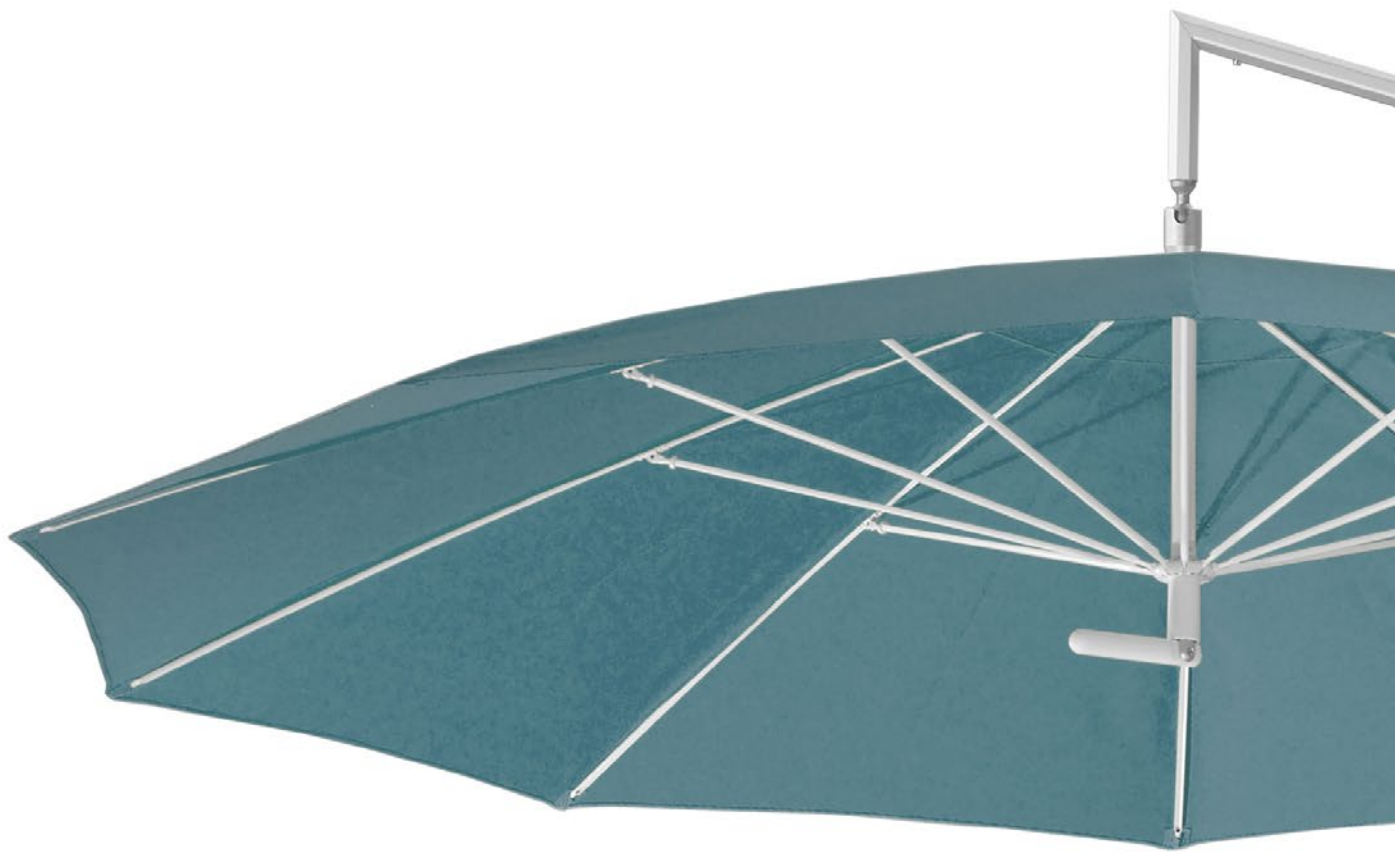

VERSATILE DESIGNER

SIDE-POST PARASOL

maximum flexibility

elegant design

**high-grade steel
and aluminium**

**product video at
www.may-online.com**

Made in Germany





DACAPO Ø 3.0 m
MayTex-Acryl SA 314 011 royal blue





DACAPO DG Ø 3.0 m
MayTex-Acryl SA 314 003 yellow

Complete freedom of movement

The position of the mast of DACAPO side-post parasols allows completely unencumbered movement in shaded areas. Consequently, you will be able to make full use of your garden, balcony or patio space.

Canopy covering fabric

For fabrics and colours see page 46 onwards.

Installation options

mobile see page 35 onwards,
stationary see page 40 onwards.




Ball joint

Maximum movability of the canopy

The canopy of the parasol can be tilted at any angle, depending on the position of the sun. E.g. set at an angle of 90°, it can protect you from the low rays of the sun or serve as a screen for privacy.

When not in use

The protective cover provided can easily be slipped over the shade during bad weather periods.

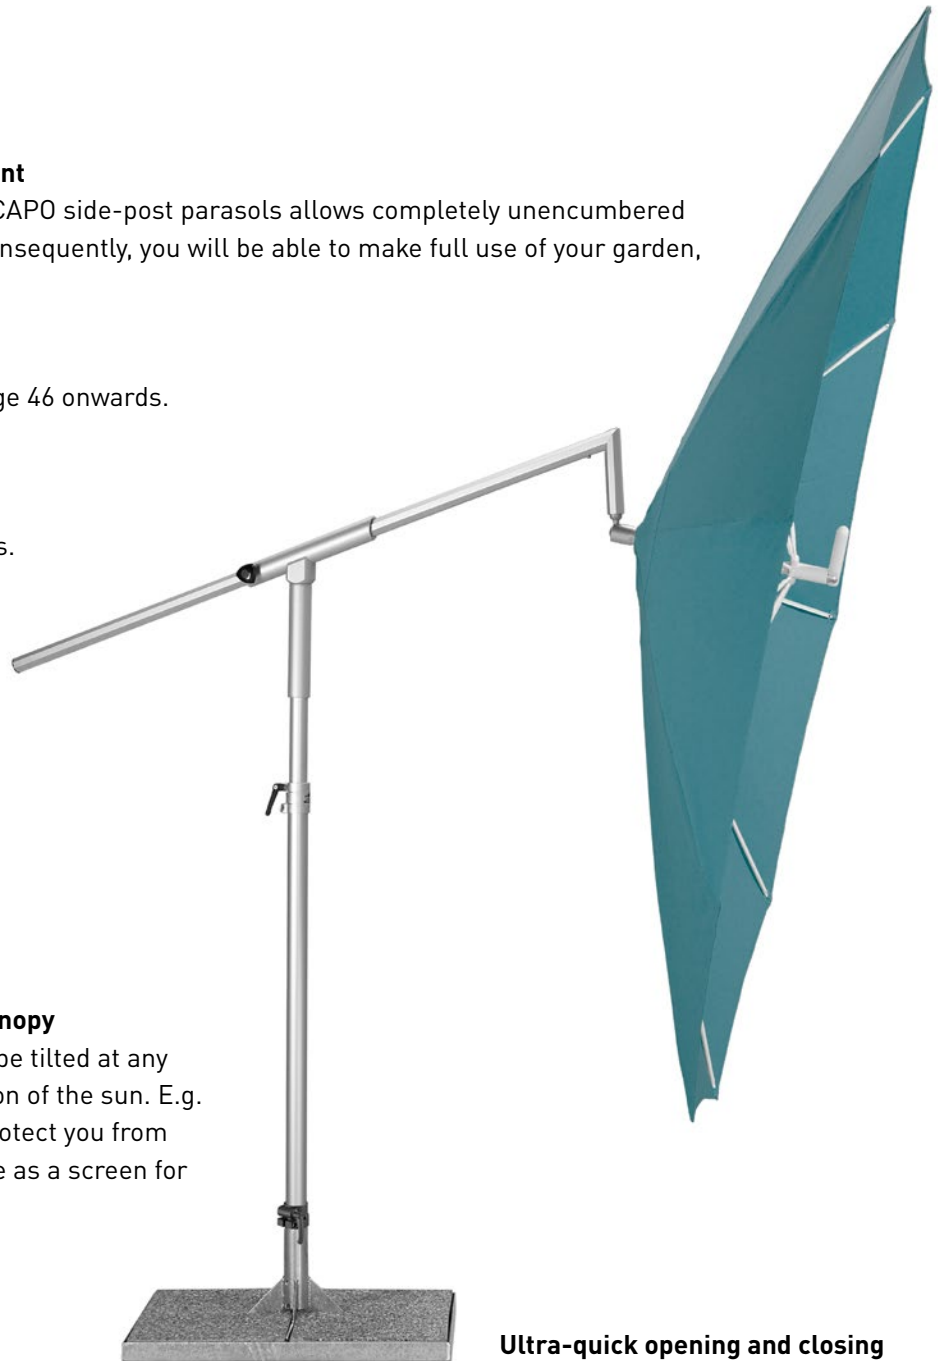

Ultra-quick opening and closing

A technical tour de force. DACAPO can be opened in next to no time and closed again just as quickly. No need to dismount anything. When closed and folded together, the space-saving parasol can easily be stored away.



DACPO DG – standard model and DACPO DK – with crank for cross arm regulation

With the help of a ball-joint mechanism the DACAPO canopy can be tilted to any required angle – depending on the position of the sun – and then locked. The standard incorporation of a pneumatic spring in the parasol mast enables easy height (vertical) adjustment. If requested, parasols can also be supplied with a crank for horizontal operation of the cross arm. In that case order DACAPO DK.



DG, Dacapo standard version



DK, Dacapo with crank

High-quality framework materials

The poles of our parasols are all made of high-quality alloyed, extruded aluminium profiles. Frame surfaces are anodized, highly impact-proof, and available in the colour EV1 anodized silver-grey. The spokes are of spring steel and powder-coated, available in white aluminium RAL 9006.

Valance options




straight valance




without valance



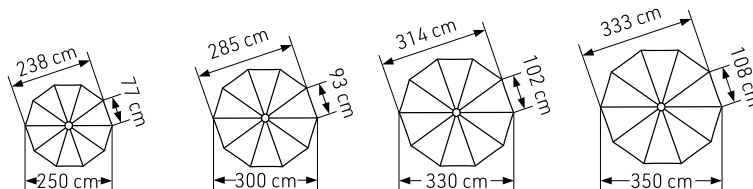


DACAPO standard model DG		Ø 2,5 m	Ø 3,0 m	Ø 3,3 m ³⁾	Ø 3,5 m ²⁾³⁾
Segments		10	10	10	10
Area	m ²	4,6	6,6	8	9
A	min./max.	cm	258 / 298	258 / 298	255 / 295
B		cm	160	160	180
C	min./max.	cm	223 / 263	223 / 263	223 / 263
D		cm	186	186	207
H	min./max.	cm	195 / 235	195 / 235	195 / 235
K¹⁾	min./max.	cm	105 / 145	78 / 118	69 / 109
L¹⁾	min./max.	cm	182 / 222	175 / 215	188 / 228
M¹⁾	min./max.	cm	69 / 109	69 / 109	47 / 87
O¹⁾	min./max.	cm	56 / 96	56 / 96	30 / 70
	Weight without packaging	kg	18	19	19
P	Support pole diameter	mm	outer-Ø 55, pole thickness 3		
	Packaging		rectangular cardboard box: l= 235 cm, w= 32 cm, h= 18 cm, approx. 3 kg		
	Installation base length/width/min. depth	cm	50/50/60		
	Minimum-ballast Number of layers of concrete slabs XZ40 required		1 x = approx. 72 kg		2 x = approx. 144 kg

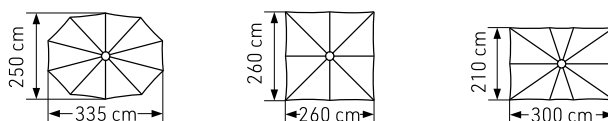

DACAPO standard model DG		2,5 × 3,35 m ⁴⁾	2,6 × 2,6 m	2,1 × 3,0 m ⁴⁾
Segments		10	8	10
Area	m ²	6,8	6,8	6,3
A	min./max.	cm	255 / 295	255 / 295
B		cm	180	180
C	min./max.	cm	223 / 263	223 / 263
D		cm	207	207
H	min./max.	cm	195 / 235	195 / 235
K¹⁾	min./max.	cm	105 / 145	102 / 142
L¹⁾	min./max.	cm	171 / 211	210 / 250
M¹⁾	min./max.	cm	30 / 70	47 / 87
O¹⁾	min./max.	cm	16 / 56	29 / 69
	Weight without packaging	kg	20	20
P	Support pole diameter	mm	outer-Ø 55, pole thickness 3	
	Packaging		rectangular cardboard box: l= 235 cm, w= 32 cm, h= 18 cm, approx. 3 kg	
	Installation base length/width/min. depth	cm	50/50/60	
	Minimum-ballast Number of layers of concrete slabs XZ40 required		1 x = approx. 72 kg	

Dimensional tolerance approx. 5%.

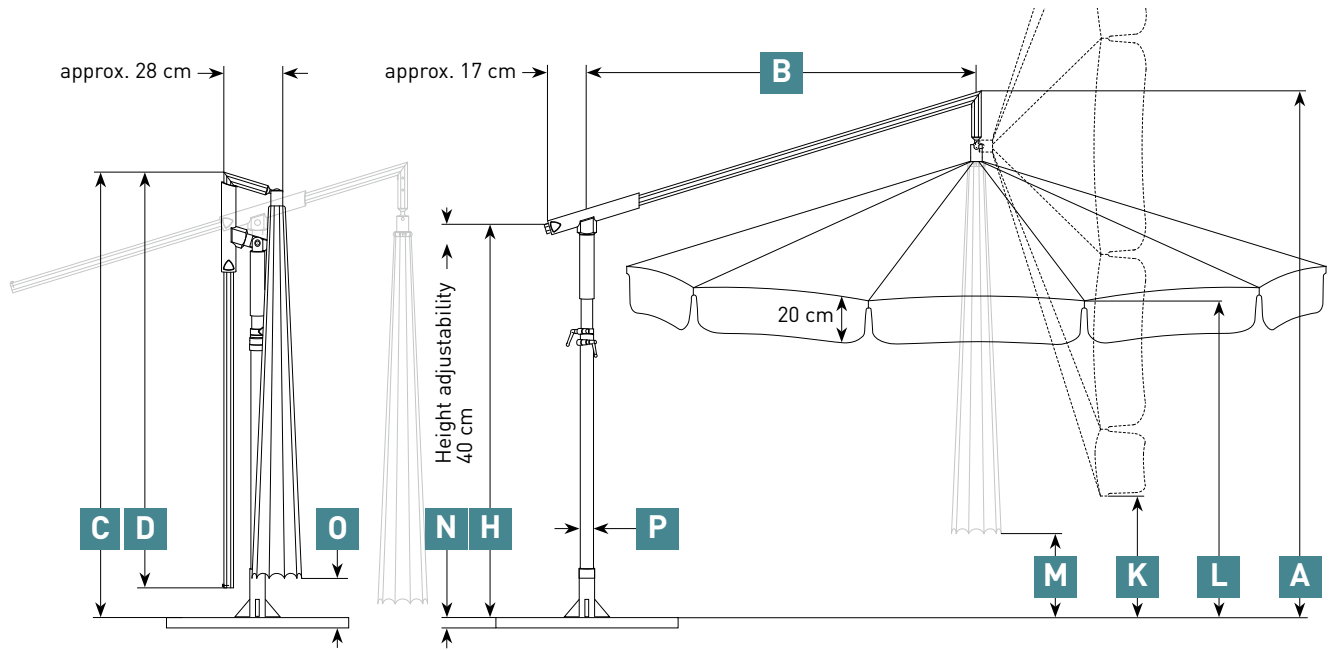


N The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube (DMZ118, DMZ146). The increase in height for parasols with other installation bases can be seen in the list below:

Cross pedestal: DMZ110 + 6 cm
 Full frame pedestal: DMZ411 + 9 cm
 Full frame pedestal: DMZ412 + 12 cm
 Full frame pedestal: DMZ414 + 16 cm
 Full frame pedestal: DMZ420 + 19 cm


Granite base: DMZ141 + 10 cm
 Wheeled pedestal: DMZ282 + 14/15 cm
 Anchor plate: DMZ261 + 4 cm
 Base plate: DMZ271 + 12 cm


Adjustable to suit your individual needs

- 1** No matter where the sun is, the parasol canopy can be tilted at any angle for shade and protection, then locked. (DG and DK).
- 2** Effortless height adjustment thanks to standard incorporation of a pneumatic spring in the support pole (DG and DK).
- 3** The cross arm can easily be adjusted (DG).

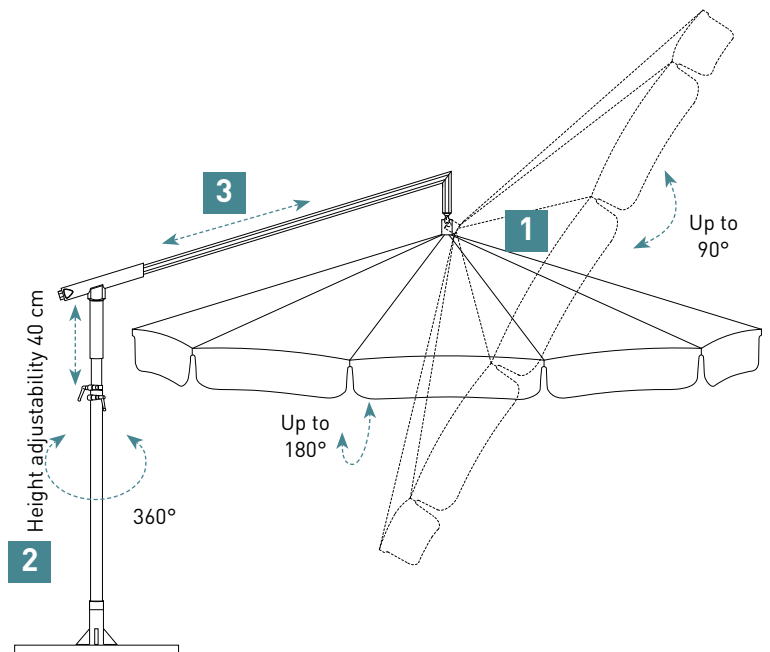


¹⁾ Parasols with valance less 20 cm.
²⁾ Ø 3.5 m: in MayTex-Poly only.
³⁾ Additional pedestal weight may be required for windy locations (upwind, sloping sites and so on). Do not use granite base. Pedestals require 2 sets of concrete slabs.
⁴⁾ The canopy is vaulted, so that the corner spokes are approx. 9-18 cm lower than the centre spokes (cf. sketch).

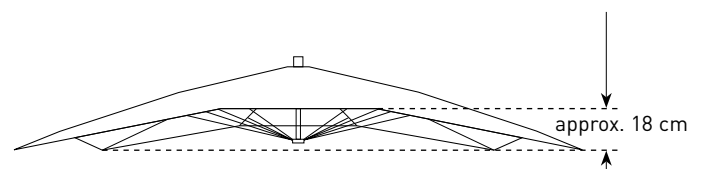

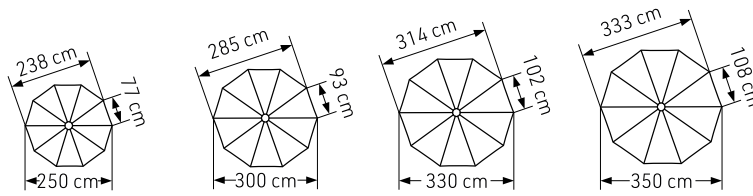


DACAPO with crank DK		Ø 2,5 m	Ø 3,0 m	Ø 3,3 m³⁾	Ø 3,5 m²⁾³⁾
	Segments	10	10	10	10
	Area m ²	4,6	6,6	8	9
A	min./max.	cm	240 / 280	240 / 280	250 / 290
B		cm	160	160	180
C	min./max.	cm	212 / 252	212 / 252	215 / 255
D		cm	186,5	186,5	206,5
H	min./max.	cm	185 / 225	185 / 225	185 / 225
K¹⁾	min./max.	cm	90 / 130	70 / 110	60 / 100
L¹⁾	min./max.	cm	170 / 210	160 / 200	170 / 210
M¹⁾	min./max.	cm	60 / 100	60 / 100	40 / 80
O¹⁾	min./max.	cm	44 / 84	45 / 85	19 / 59
	Weight without packaging	kg	18	19	19
P	Support pole diameter	mm	outer-Ø 55, pole thickness 3		
	Packaging		rectangular cardboard box: l= 235 cm, w= 32 cm, h= 18 cm, approx. 3 kg		
	Installation base length/width/min. depth	cm	50/50/60		
	Minimum-ballast Number of layers of concrete slabs XZ40 required		1 x = approx. 72 kg		2 x = approx. 144 kg

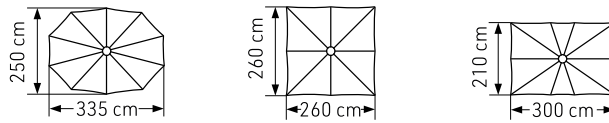

DACAPO with crank DK		2,5 × 3,35 m⁴⁾	2,6 × 2,6 m	2,1 × 3,0 m⁴⁾
	Segments	10	8	10
	Area m ²	6,8	6,8	6,3
A	min./max.	cm	250 / 290	250 / 290
B		cm	180	180
C	min./max.	cm	215 / 255	215 / 255
D		cm	206,5	206,5
H	min./max.	cm	185 / 225	185 / 225
K¹⁾	min./max.	cm	93 / 133	92 / 130
L¹⁾	min./max.	cm	160 / 200	198 / 238
M¹⁾	min./max.	cm	32 / 72	32 / 71
O¹⁾	min./max.	cm	16 / 56	16 / 56
	Weight without packaging	kg	20	20
P	Support pole diameter	mm	outer-Ø 55, pole thickness 3	
	Packaging		rectangular cardboard box: l= 235 cm, w= 32 cm, h= 18 cm, approx. 3 kg	
	Installation base length/width/min. depth	cm	50/50/60	
	Minimum-ballast Number of layers of concrete slabs XZ40 required		1 x = approx. 72 kg	

Dimensional tolerance approx. 5%.

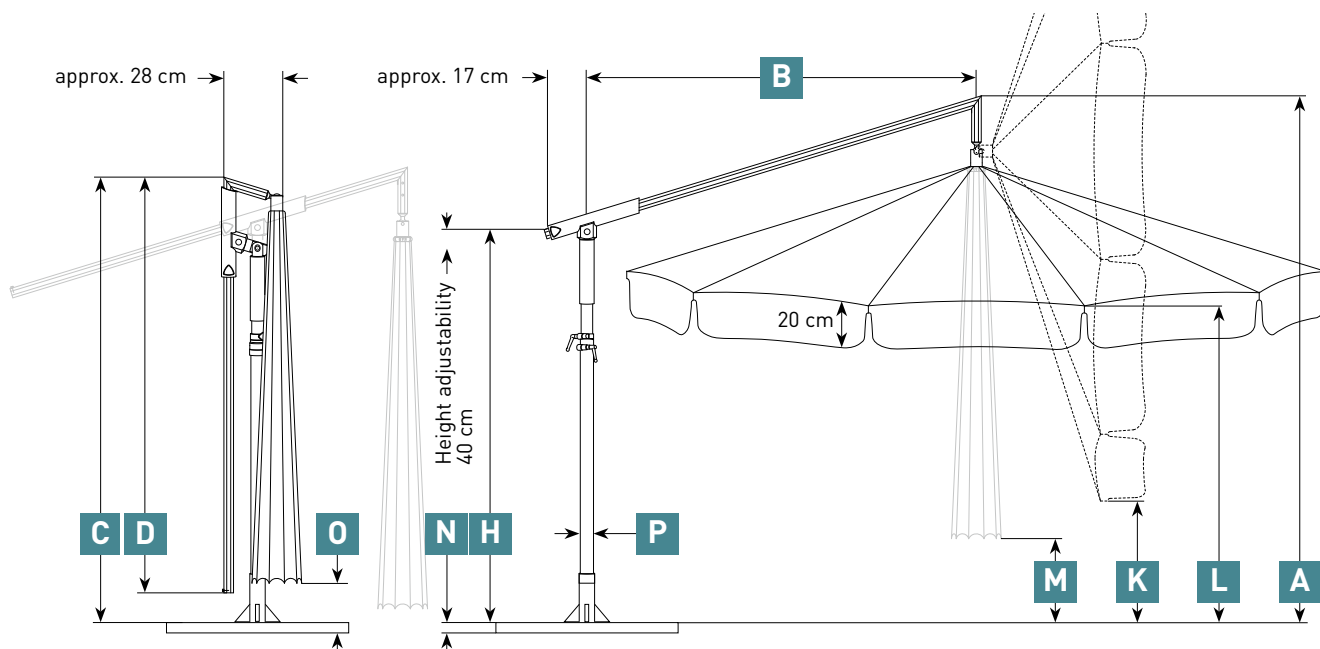


N The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube (DMZ118, DMZ146). The increase in height for parasols with other installation bases can be seen in the list below:

Cross pedestal: DMZ110 + 6 cm
 Full frame pedestal: DMZ411 + 9 cm
 Full frame pedestal: DMZ412 + 12 cm
 Full frame pedestal: DMZ414 + 16 cm
 Full frame pedestal: DMZ420 + 19 cm

Granite base: DMZ141 + 10 cm
 Wheeled pedestal: DMZ282 + 14/15 cm
 Anchor plate: DMZ261 + 4 cm
 Base plate: DMZ271 + 12 cm

Adjustable to suit your individual needs

- 1** No matter where the sun is, the parasol canopy can be tilted at any angle for shade and protection, then locked (DG and DK).
- 2** Effortless height adjustment thanks to standard incorporation of a pneumatic spring in the support pole (DG and DK).
- 3** On special request, additional crank for easy horizontal adjustment (DK).

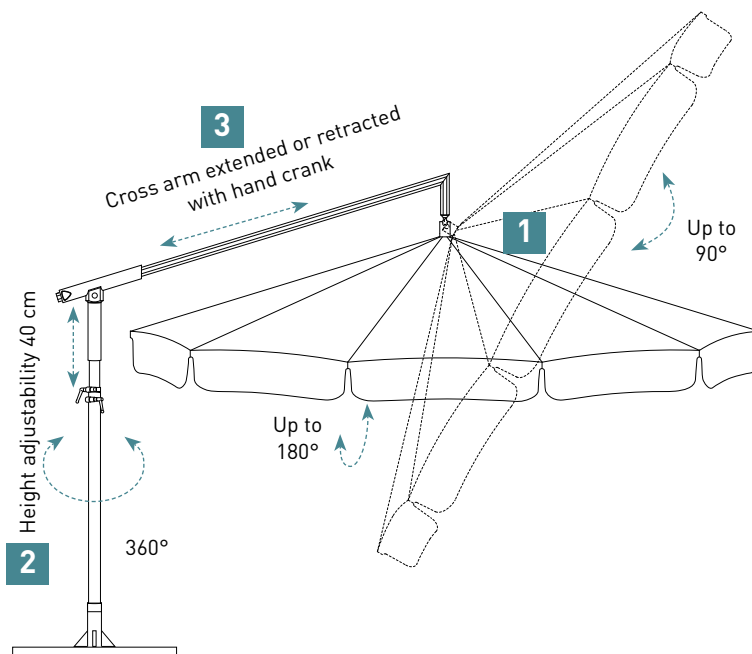

¹⁾ Parasols with valance less 20 cm.
²⁾ Ø 3.5 m: in MayTex-Poly only.
³⁾ Additional pedestal weight may be required for windy locations (upwind, sloping sites and so on). Do not use granite base. Pedestals require 2 sets of concrete slabs.
⁴⁾ The canopy is vaulted, so that the corner spokes are approx. 9-18 cm lower than the centre spokes (cf. sketch).

