


# FABRIC REMOVAL

Cabana/Room

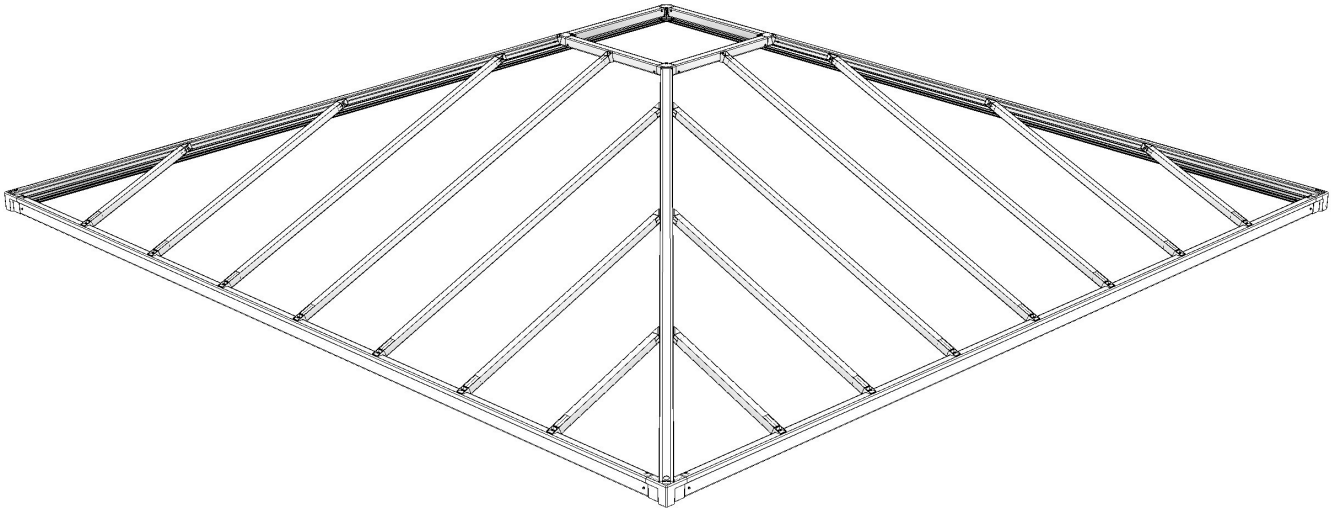

For assistance Call:  
**1 (207) 795-6536**

## PROCESS:

- 1 Start by removing the tension straps.
- 2 Flip up the valance to access the tension rods.
- 3 Remove all of the tension rods.
- 4 Remove the fasteners securing the cupola to the frame. (5/16 Nut Driver)
- 5 Remove the cupola by lifting from below. Pass the cupola to your partner carefully as not too scar the fabric.
  - Store the cupola with the fabric attached.
- 6 Remove the fasteners securing the fabric to the frame. (5/16 Nut Driver)
- 7 Remove the fabric by sliding it off of one side of the Cabana frame.
  - Transport to a clean, dry space to fold.
- 8 Spread out the fabric, oriented so the top is facing up.

# SERVICE INSTRUCTIONS



- 9 Each half in thirds, meeting in the center at the cupola opening.
- 10 Overlap the two halves.
- 11 Fold each side towards the middle in the same fashion as before.
- 12 Store in a safe, dry place.